

MARATHON® SPECIFICATIONS

DESCRIPTION			DIMENSIONS			ENERGY INFO
GAL. CAP.	MODEL NUMBER	FIRST HR. RATING GPH	HEIGHT TO T&P (IN.)	DIAM. (IN.)	APPROX. SHIP. WT. (LBS.)	ENERGY FACTOR
30	MR30238 ¹	42	49-1/2	21-5/8	75	0.95
30	MR30245 ¹	42	49-1/2	21-5/8	75	0.95
40	MR40245 ¹	52	65-1/2	21-3/4	90	0.95
50	MR50245 ¹	61	66-3/4	23-1/2	100	0.95
50 SHORT	MSR50245 ¹	54	47-1/4	28-1/4	95	0.95
75	MHD75245 ²	78	62-5/8	28-1/4	122	-
85	MHD85245 ²	91	70-1/4	28-1/4	134	-
105	MHD105245 ²	104	70-3/4	30-1/4	152	-

MARATHON® POINT-OF-USE SPECIFICATIONS

DESCRIPTION				DIMENSIONS (IN.)	
GAL. CAP.	MODEL NUMBER	ELEMENT WATTAGE	VOLTAGE	HEIGHT TO T&P	DIAM.
15	MR15120 ¹	2000	120	35-3/4	21-3/4
19.9	MR20120 ¹	2000	120	34-1/2	23-1/2
19.9	MR20230 ¹	3000	240	34-1/2	23-1/2

¹Canadian models have different model numbers than U.S. models. Add a "C" before the model number (e.g. CMR85245) when ordering. Water heaters furnished with standard 240 or 120 volt AC, single phase non-simultaneous wiring and 4500 watt upper and lower heating elements. 3000 and 3800 watt elements are also available. If heating elements of different wattages than those shown are demanded, they must be specifically requested. For height to top and T&P and heat traps add 3-1/2" to the height to water connection. Maximum test pressure: 300 PSI. Maximum working pressure: 150 PSI.

²Recovery Capacity is based upon a 100°F water temperature rise and calculated per ANSI Z21.10.3 standards. First hour hot water delivery is based upon 77° water temperature rise. Water heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring; available in 3800 and 4500 watt double element configuration (85-gallon 3000 watt). For height to top of heat traps add 3-1/2" to the height to water connection. Maximum test pressure: 300 PSI; Maximum working pressure: 150 PSI. 180°F Max. temperature setting

³Warranty is provided to original customer in a residential application after online product registration is complete. Registration must be completed within 90 days of installation. See warranty certificate for complete information.

⁴See warranty certificate for complete information

⁵Based on comparison to a 50-gallon standard residential electric water heater at an average price point of \$359 multiplied by number of water heaters needed for replacement

⁶Lifetime for U.S. defined as 99 years and replacing a standard electric water heater with a 6-year warranty

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

**THE RHEEM® MARATHON—BUILT TO LAST.
WARRANTIED FOR LIFE.**

For more information, call 1-800-621-5622, visit Rheem.com/HotWater4Life or see your local distributor.

PRINTED IN U.S.A. • 02/16 • WP • FORM NO. 104-8

A LIFETIME OF

H^OT WATER

**OUTLASTS
STANDARD
ELECTRIC
WATER
HEATERS**



visit Rheem.com/HotWater4Life for more information.



The new degree of comfort.™

RHEEM® MARATHON® SELLING POINTS

Here's why the line of Rheem® Marathon® Electric Water Heaters is the lifelong choice for you and your customers.

Lifetime Tank Warranty

Tank is built to last for as long as the customer owns their home

- Eliminates call backs due to durability issues
- The last water heater homeowners will buy for their home—eliminating the cost of reinstalling a water heater every ten years (national average)
- FREE warranty upgrade from 10 years to Lifetime if customer registers online¹
- Proven design since 1989
- Unmatched strength, toughness and durability

Easy Installation and Service


- Lightweight and resourcefully designed
- One-person, low-cost installation due to low weight
- Quick maintenance thanks to a bowl-shaped tank bottom that drains completely and no anode rod to replace

Non-Metallic Tank

- Seamless, blow-molded polybutene inner tank will not rust or corrode
- Outer tank resists dents, scratches and salt air
- Offers the best durability, withstands the harshest environments and eliminates smelly water due to chemical reactions with sulfates

High Efficiency

- Two-and-a-half inches of polyurethane foam insulation minimizes stand-by heat loss allowing only 5° F loss in 24 hours - saves money on the homeowner's energy bill
- Cost-to-own becomes more important to customers as energy costs rise

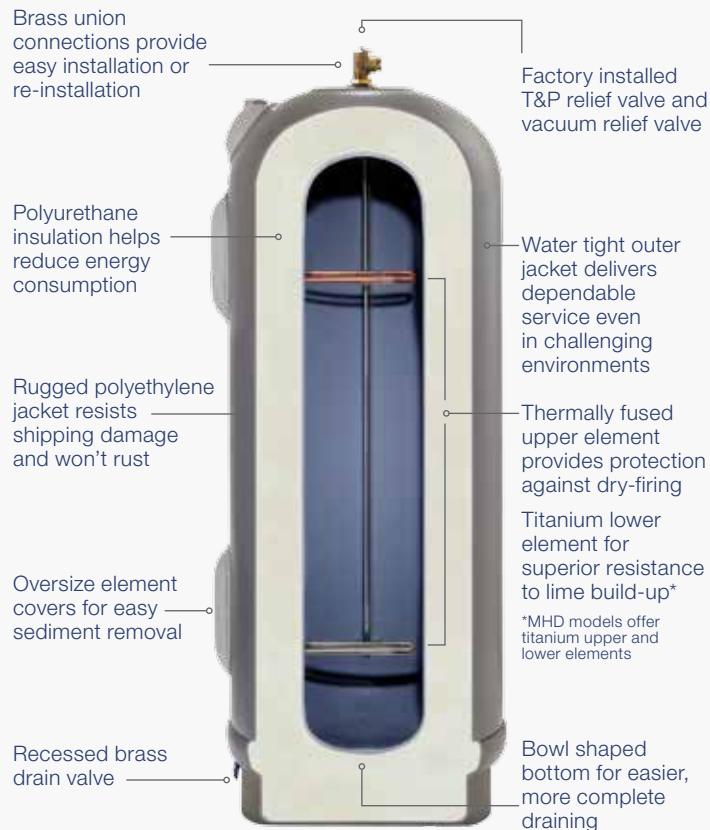

THE RHEEM MARATHON VS. COMPETITOR'S STAINLESS STEEL TANK

FEATURE COMPARISON	PLASTIC TANK (MARATHON)	COMPETITOR'S STAINLESS STEEL TANK
Number of Replacement Units Allowed	Perpetual	1 allowed / customer
Warranty Restriction due to Water Condition	No	Yes
Warranty Restriction due to Water Temperature	No	Yes
Warranty Transferable ²	✓	✗
Low Product Weight	✓	✗
Dry Fire Protection	✓	✗
Element	Titanium	Stainless Steel
Dent / Corrosion Resistant Jacket	✓	✗
Salt Water Resistant Jacket	✓	✗

THE RHEEM MARATHON VS. RHEEM STANDARD ELECTRIC STEEL TANK

FEATURE COMPARISON	MARATHON	RHEEM STANDARD ELECTRIC STEEL TANK PRODUCT
Lifetime Savings on Water Heater Replacement	\$ 5,744 ³	0
Low Product Weight	✓	✗
Dry Fire Protection	✓	✗
Element	Titanium	Copper
Anode Rod Needed	No	Yes
Corrosion Resistant	✓	✗
Warranty ¹	Lifetime	6 years
Water Heaters Needed Over Lifetime ¹	1	16 ⁴
Dent / Corrosion Resistant Jacket	✓	✗
Salt Water Resistant Jacket	✓	✗